



IPE	dimensions					poids kg / m
	h mm	b mm	tw mm	tf mm	r mm	
IPE 100	100	55	4,1	5,7	7	8,26
IPE 120	120	64	4,4	6,3	7	10,57
IPE 140	140	73	4,7	6,9	7	13,14
IPE 160	160	82	5,0	7,4	9	16,07
IPE 180	180	91	5,3	8,0	9	19,16
IPE 200	200	100	5,6	8,5	12	22,79
IPE 220	220	110	5,9	9,2	12	26,70
IPE 240	240	120	6,2	9,8	15	31,29
IPE 270	270	135	6,6	10,2	15	36,76
IPE 300	300	150	7,1	10,7	15	43,05
IPE 330	330	160	7,5	11,5	18	50,08
IPE 360	360	170	8,0	12,7	18	58,18
IPE 400	400	180	8,6	13,5	21	67,57
IPE 450	450	190	9,4	14,6	21	79,06
IPE 500	500	200	10,2	16,0	21	92,42
IPE 550	550	210	11,1	17,2	24	107,53
IPE 600	600	220	12,0	19,0	24	124,79

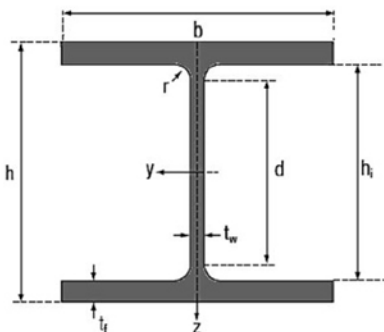

HEA	dimensions					poids kg / m
	h mm	b mm	tw mm	tf mm	h mm	
HEA 100	96	100	5,0	8,0	12	16,99
HEA 120	114	120	5,0	8,0	12	20,27
HEA 140	133	140	5,5	8,5	12	25,13
HEA 160	152	160	6,0	9,0	15	31,02
HEA 180	171	180	6,0	9,5	15	36,20
HEA 200	190	200	6,5	10,0	18	43,06
HEA 220	210	220	7,0	11,0	18	51,47
HEA 240	230	240	7,5	12,0	21	61,47
HEA 260	250	260	7,5	12,5	24	69,46
HEA 280	270	280	8,0	13,0	24	77,81
HEA 300	290	300	8,5	14,0	27	90,02
HEA 320	310	300	9,0	15,5	27	99,49
HEA 340	330	300	9,5	16,5	27	106,78
HEA 360	350	300	10,0	17,5	27	114,21
HEA 400	390	300	11,0	19,0	27	127,18
HEA 450	440	300	11,5	21,0	27	142,42
HEA 500	490	300	12,0	23,0	27	158,03
HEA 550	540	300	12,5	24,0	27	169,41
HEA 600	590	300	13,0	25,0	27	181,17
HEA 650	640	300	13,5	26,0	27	193,31
HEA 700	690	300	14,5	27,0	27	208,38